arXiv:1207.2981v1 [math.DS] 12 Jul 2012

Geometry of deadbeat synchronization

S. Emre Tuna*

July 13, 2012

Abstract

Deadbeat synchronization of identical discrete-time nonlinear systems is studied from a geometric point of view. An array of deadbeat observers coupled via a deadbeat interconnection is shown to achieve synchronization in finite number of steps provided that a compatibility condition is satisfied between the observer and the interconnection. As an illustration to the theory, an example is provided where an array of third order observers achieves deadbeat synchronization.

1 Introduction

Two or more dynamical systems are said to synchronize when their solutions converge to a common trajectory. The generality of this definition allows many seemingly different cases to make examples of synchronization [16]. One such example is the following pair of discrete-time linear systems

$$\begin{aligned} x_1^+ &= Ax_1 && \text{(1a)} \\ x_2^+ &= Ax_2 + L(y_1 - y_2) && \text{(1b)} \end{aligned}$$

where $y_i = Cx_i$ and all the eigenvalues of the matrix $A - LC$ are on the open unit disc. The second system (1b) is the classic linear observer [11] and its construction readily yields $\|x_1(k) - x_2(k)\| \to 0$ as $k \to \infty$ regardless of the initial conditions. Another linear example to synchronization is the following array of systems with rather simple dynamics

$$y_i^+ = \sum_{j=1}^{q} \gamma_{ij} y_j \,, \qquad i = 1, 2, \ldots, q \tag{2}$$

where $[\gamma_{ij}] \in \mathbb{R}^{q\times q}$ is a *(connected) coupling matrix*. That is, $[\gamma_{ij}]$ satisfies: (i) the entries of each row sum up to unity, which implies that $\lambda = 1$ is an eigenvalue with the eigenvector $[1\ \ 1\ \ \ldots\ \ 1]^T$, and (ii) all the remaining eigenvalues are on the open unit disc. In this case the solutions $y_i(k)$ converge to a fixed point in space and the systems are said to reach consensus [8, 7].

---

*The author is with Department of Electrical and Electronics Engineering, Middle East Technical University, 06800 Ankara, Turkey. Email: `tuna@eee.metu.edu.tr`

At first sight the arrays (1) and (2) may not seem to be relevant, but they are in fact the two limiting cases of the following general structure

$$\begin{aligned} x_i^+ &= Ax_i + L\left(\sum_{j=1}^{q}\gamma_{ij}y_j - y_i\right), \qquad i = 1, 2, \ldots, q \\ y_i &= Cx_i\,. \end{aligned} \tag{3}$$

Note that (3) boils down to (1) for

$$[\gamma_{ij}] = \begin{bmatrix} 1 & 0 \\ 1 & 0 \end{bmatrix}$$

and to (2) for $A = C = L = I$. An effective way to study the synchronization behavior of an array is through understanding the smaller pieces that it is made of [19, 9, 13]. So if the array (3) is what we are trying to understand then it is worthwhile to focus on its two limiting cases: the array (1) and the array (2). In this line of thinking, the very first question that one is tempted to ask is the following. *Given that the system (1b) is an observer for the system (1a) and that the array* (2) *reaches consensus, does the array* (3) *synchronize?* However a counterexample is easy to construct and this naive guess has to be abandoned.

Having dispensed with the first question, there does not seem to be an obvious next one to ask. Hence, among many possibilities, we point our attention to the following. *Given that the system (1b) is a deadbeat observer [2, 15, 14] for the system (1a) and that the array* (2) *reaches consensus in finite number of steps [5, 12], does the array* (3) *synchronize?* This guess turns out to be more fruitful than the first one. In fact not only the synchronization is achieved in this case, but it is achieved in deadbeat fashion, that is, in finite number of steps. Motivated by this simple observation on linear systems, we aim in this paper to establish sufficient conditions that guarantee *deadbeat synchronization* in an array of coupled identical discrete-time nonlinear systems. What we particularly study here is the synchronization behavior of an array of deadbeat observers that are coupled through a fixed interconnection scheme which itself, if considered separately as the righthand side of an array, enjoys deadbeat synchronization. We show that deadbeat synchronization is achieved under a compatibility condition between the observer and the interconnection.

The literature accommodates few results on deadbeat synchronization. Motivated by possible applications in secure communications, one of the earliest results on the subject is presented in [1], where conditions for the synchronization of *two systems* of type Lur'e, coupled via a *scalar output* signal are given. Later, certain improvements to this work are reported in [6, 3, 4], where synchronization still requires that the number of systems is two and the output is scalar. To the best of our knowledge, the problem of deadbeat synchronization has not yet been considered in a general setting where the number of (identical, nonlinear) individual systems are arbitrary and the output signals, through which the systems are coupled, are not necessarily scalar.

The remainder of the paper is organized as follows. The next section contains some preliminary material. In Section 3 is the construction of deadbeat observer, which is of geometric nature [17, 18] and makes a special case of what is presented in [14]. The reader will find an illustrative example following this construction. As mentioned earlier, the observer together with the system being observed make a particular case of synchronization where there are only two systems. To reach a natural generalization of this scenario we take two mental steps. First, we remove the distinction between the two systems by allowing each to observe the other. Second, having removed the distinction between observer and observee, we allow the number of systems involved to be arbitrary. At that point a method is required to couple this array of observers. Therefore we introduce in Section 4 what we call *deadbeat interconnection*, which basically is a nonlinear generalization of the time-invariant map (coupling matrix) that appears in linear deadbeat consensus. Then in Section 5 we bring together the observer construction of Section 3 and the coupling scheme of Section 4 to define the array of coupled observers. There we establish the deadbeat synchronization of this array under a compatibility condition that concerns both the observer and the interconnection. In Section 6 we provide a nonlinear example where an array of third order deadbeat observers are shown to achieve deadbeat synchronization. Certain issues are discussed in Section 7.

2 Preliminaries

The set of nonnegative integers is denoted by $\mathbb{N}$, the set of rational numbers by $\mathbb{Q}$. A vector of all ones is denoted by $\mathbf{1}$. The $m \times m$ identity matrix is denoted by I_m, or sometimes simply by I when what m should be is either obvious or immaterial. The symbol $\otimes$ denotes Kronecker product. The null space of a matrix $M \in \mathbb{R}^{m\times n}$ is denoted by $\mathcal{N}(M)$ and $M^\perp$ denotes some real matrix, whose columns form a basis for $\mathcal{N}(M)$. For square M we let $M^0 = I$. Given a map $h : \mathcal{X} \to \mathcal{Y}$, h^{-1} denotes the *inverse* map in the general sense that for $y \in \mathcal{Y}$, $h^{-1}(y)$ is the set of all $x \in \mathcal{X}$ satisfying $h(x) = y$. That is, we will not need h be bijective when talking about its inverse. For $f : \mathcal{X} \to \mathcal{X}$ we let $f^0(x) = x$, $f^{k+1}(x) = f(f^k(x))$, and $f^{-k} = (f^{-1})^k$ for $k \in \mathbb{N}$. Given vectors $x_1, x_2, \ldots, x_q \in \mathbb{R}^n$ we write $(x_1, x_2, \ldots, x_q)$ to mean $[x_1^T\ x_2^T\ \ldots\ x_q^T]^T \in \mathbb{R}^{qn}$. We sometimes use "$*$" as a placeholder for "don't care."

3 Deadbeat observer

Unlike linear systems, there is not a standard deadbeat observer construction for nonlinear systems. Even the definition of a deadbeat observer may not be unique. The definition and the construction that we present in this section are adopted from [14].

3.1 Definition

Consider the following discrete-time system

$$x^+ = f(x)\,, \quad y = h(x) \tag{4}$$

where $x \in \mathcal{X} \subset \mathbb{R}^n$ is the *state*, x^+ is the state at the next time instant, and $y \in h(\mathcal{X}) =: \mathcal{Y} \subset \mathbb{R}^m$ is the *output* or the *measurement*. The *solution* of the system (4) at time $k \in \mathbb{N}$, starting at the initial condition $x(0) \in \mathcal{X}$ is denoted by $x(k)$. Now consider the following array

$$\begin{aligned} x^+ &= f(x) && \text{(5a)} \\ \hat{x}^+ &= g(\hat{x},\, h(x))\,. && \text{(5b)} \end{aligned}$$

The solution of the system (5b) at time $k \in \mathbb{N}$, starting at the initial condition $\hat{x}(0) \in \mathcal{X}$ is denoted by $\hat{x}(k)$. Note that $\hat{x}(k)$ depends also on $x(0)$. We now use (5) to define deadbeat observer.

Definition 1 *Given $g : \mathcal{X} \times \mathcal{Y} \to \mathcal{X}$, the system*

$$\hat{x}^+ = g(\hat{x},\, y)$$

is said to be a deadbeat observer for the system (4) *if there exists $p \in \mathbb{N}$ such that, for all initial conditions, the solutions of the array (5) satisfy $\hat{x}(k) = x(k)$ for all $k \geq p$. The integer p then is called a* deadbeat horizon.

3.2 Construction

To be used in the construction of the observer we define certain sets associated with the system (4). For $x \in \mathcal{X}$ we let

$$[x]_0 := h^{-1}(h(x))\,.$$

Note that when $h(x) = Cx$, where $C \in \mathbb{R}^{m \times n}$, we have $[x]_0 = x + \mathcal{N}(C)$. We then let for $k \in \mathbb{N}$

$$[x]_{k+1} := [x]_k^+ \cap [x]_0$$

where

$$[x]_k^+ := f([f^{-1}(x)]_k)\,.$$

We finally let

$$[x]_{-1}^+ := \mathcal{X}\,.$$

We make the following two assumptions to guarantee that the observer construction will work. We note that these conditions are only sufficient. For less restrictive assumptions see [14].

Assumption 1 *The map* $f:\mathcal{X}\to\mathcal{X}$ *is bijective.*

Assumption 2 *There exists* $p\geq 1$ *such that* $[x]^{+}_{p-2}\cap h^{-1}(y)$ *is singleton for all* $x\in\mathcal{X}$ *and* $y\in\mathcal{Y}$*.*

The below result tells us how to design a deadbeat observer under the above assumptions.

Theorem 1 *Suppose Assumptions 1-2 hold. Then the system*

$$\hat{x}^{+}=f([\hat{x}]^{+}_{p-2}\cap h^{-1}(y)) \tag{6}$$

is a deadbeat observer for the system (4) *with deadbeat horizon* p*.*

Theorem 1 will later make a corollary of our main result (Theorem 4) hence we omit the proof. Let us now give an example to this construction (6).

3.3 Example

Consider the system (4) with

$$f(x)=\left[\begin{array}{c}1+\xi_2-a\xi_1^2\\ b\xi_1+\xi_3\\ -b\xi_1\end{array}\right]$$

where $x=(\xi_1,\,\xi_2,\,\xi_3)\in\mathbb{R}^3$. This map appears in [10] where it is reported to exhibit chaotic behavior for certain values of real numbers a and b. Let us now construct a deadbeat observer taking $h(x)=\xi_3$. Note first that f is bijective (for b nonzero) and its inverse is

$$f^{-1}(x)=\left[\begin{array}{c}-b^{-1}\xi_3\\ -1+ab^{-2}\xi_3^2+\xi_1\\ \xi_2+\xi_3\end{array}\right] \tag{7}$$

Since $h(x)=\xi_3$ we can write

$$[x]_0=\left\{\left[\begin{array}{c}s\\ t\\ \xi_3\end{array}\right]:s,\,t\in\mathbb{R}\right\} \tag{8}$$

Then by (7)

$$\begin{aligned}[x]^{+}_0 &= f([f^{-1}(x)]_0)\\ &= f\left(\left\{\left[\begin{array}{c}s\\ t\\ \xi_2+\xi_3\end{array}\right]:s,\,t\in\mathbb{R}\right\}\right)\\ &= \left\{f\left(\left[\begin{array}{c}s\\ t\\ \xi_2+\xi_3\end{array}\right]\right):s,\,t\in\mathbb{R}\right\}\\ &= \left\{\left[\begin{array}{c}t\\ s+\xi_2+\xi_3\\ -s\end{array}\right]:s,\,t\in\mathbb{R}\right\}\end{aligned} \tag{9}$$

The set $[x]_1$ is defined to equal $[x]_0^+ \cap [x]_0$. The intersection of the sets (8) and (9) yields

$$[x]_1 = \left\{ \begin{bmatrix} u \\ \xi_2 \\ \xi_3 \end{bmatrix} : u \in \mathbb{R} \right\}$$

Now we can construct $[x]_1^+$ as

$$\begin{aligned} [x]_1^+ &= f([f^{-1}(x)]_1) \\ &= f\left(\left\{ \begin{bmatrix} u \\ -1 + ab^{-2}\xi_3^2 + \xi_1 \\ \xi_2 + \xi_3 \end{bmatrix} : u \in \mathbb{R} \right\} \right) \\ &= \left\{ \begin{bmatrix} \xi_1 + ab^{-2}\xi_3^2 - au^2 \\ bu + \xi_2 + \xi_3 \\ -bu \end{bmatrix} : u \in \mathbb{R} \right\} \end{aligned}$$

Observe that

$$\begin{aligned} [\hat{x}]_1^+ \cap h^{-1}(y) &= \left\{ \begin{bmatrix} \hat{\xi}_1 + ab^{-2}\hat{\xi}_3^2 - au^2 \\ bu + \hat{\xi}_2 + \hat{\xi}_3 \\ -bu \end{bmatrix} : u \in \mathbb{R} \right\} \cap \left\{ \begin{bmatrix} s \\ t \\ y \end{bmatrix} : s,\, t \in \mathbb{R} \right\} \\ &= \begin{bmatrix} \hat{\xi}_1 + ab^{-2}(\hat{\xi}_3^2 - y^2) \\ \hat{\xi}_2 + \hat{\xi}_3 - y \\ y \end{bmatrix} \end{aligned}$$

which means that Assumption 2 is satisfied with $p = 3$. The dynamics of the deadbeat observer then read

$$\begin{aligned} \hat{x}^+ &= f([\hat{x}]_1^+ \cap h^{-1}(y)) \\ &= \begin{bmatrix} 1 + \hat{\xi}_2 + \hat{\xi}_3 - y - a(\hat{\xi}_1 + ab^{-2}(\hat{\xi}_3^2 - y^2))^2 \\ b\hat{\xi}_1 + ab^{-1}(\hat{\xi}_3^2 - y^2) + y \\ -b\hat{\xi}_1 - ab^{-1}(\hat{\xi}_3^2 - y^2) \end{bmatrix} \end{aligned}$$

The next section describes the interconnection scheme to be used to couple the array of observers.

4 Deadbeat interconnection

Here we provide a generalization of the case where the linear array (2) reaches consensus in finite number steps, which happens when the characteristic polynomial of the $q \times q$ coupling matrix $[\gamma_{ij}]$ is $d(s) = s^{q-1}(s-1)$. When referring to such $[\gamma_{ij}]$ we will use the term *deadbeat coupling matrix*. A primitive example for $q = 3$ is as follows. Let

$$[\gamma_{ij}] = \begin{bmatrix} 0.10 & 0.65 & 0.25 \\ 0.20 & 0.30 & 0.50 \\ 0.24 & 0.16 & 0.60 \end{bmatrix} \qquad (10)$$

which yields

$$[\gamma_{ij}]^k = \begin{bmatrix} 0.2 & 0.3 & 0.5 \\ 0.2 & 0.3 & 0.5 \\ 0.2 & 0.3 & 0.5 \end{bmatrix}$$

for all $k \geq 2$. Hence the solutions satisfy $y_i(k) = 0.2y_1(0) + 0.3y_2(0) + 0.5y_3(0)$ for all $k \geq 2$. That is, the convergence is exact. Now we give the generalization.

Definition 2 *A map $\gamma = (\gamma_1, \gamma_2, \ldots, \gamma_q)$ with $\gamma_i : \mathcal{Y}^q \to \mathcal{Y}$ is said to be a* deadbeat interconnection *if the following conditions simultaneously hold.*

- *There exists an integer $r \geq 1$ such that, for all initial conditions, the solutions of the array*

  $$y_i^+ \;=\; \gamma_i(y_1, y_2, \ldots, y_q)\,, \qquad i = 1, 2, \ldots, q$$

  satisfy $y_i(k) = y_j(k)$ for all $k \geq r$ and all i, j.
- *For all $y \in \mathcal{Y}$ we have $\gamma_i(y, y, \ldots, y) = \gamma_j(y, y, \ldots, y)$ for all i, j.*

We now give some examples to this definition. Let $G \in \mathbb{R}^{q \times q}$ be a deadbeat coupling matrix and $\mathcal{Y} = \mathbb{R}^m$. Then the linear map

$$\mathbf{y} \mapsto (G \otimes Q)\mathbf{y} \tag{11}$$

with $\mathbf{y} = (y_1, y_2, \ldots, y_q)$ makes a deadbeat interconnection for any $Q \in \mathbb{R}^{m \times m}$. Note for $Q = I$ that the array (2) makes a special case of this construction. Not all linear deadbeat interconnections must have this structure (11) though. For instance, for $\mathcal{Y} = \mathbb{R}^2$ and $q = 2$, the map $\mathbf{y} \mapsto \Gamma\mathbf{y}$ with

$$\Gamma = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 1 & 1 & -1 & 0 \end{bmatrix} \tag{12}$$

can be shown to be a deadbeat interconnection for which no $G, Q \in \mathbb{R}^{2 \times 2}$ exist that yield $G \otimes Q = \Gamma$. Our last example is nonlinear. Let $[\gamma_{ij}] \in \mathbb{R}^{q \times q}$ be a deadbeat coupling matrix and $\mathcal{Y} = \mathbb{R}$. Then the map $\gamma = (\gamma_1, \gamma_2, \ldots, \gamma_q)$ with

$$\gamma_i(\mathbf{y}) = \left(\sum_{j=1}^{q} \gamma_{ij} y_j^3 \right)^{1/3} \tag{13}$$

is a deadbeat interconnection.

Having defined deadbeat observer and deadbeat interconnection, now we proceed to study the array that we form by bringing the two together.

5 Deadbeat synchronization

Let us first present the linear case which motivates the nonlinear synthesis to follow. This linear case is slightly more general than the setup (3) we brought up in the introduction.

Theorem 2 *Let $A \in \mathbb{R}^{n\times n}$, $C \in \mathbb{R}^{m\times n}$, and $L \in \mathbb{R}^{n\times m}$ be such that $A - LC$ is nilpotent. Let $[\gamma_{ij}] \in \mathbb{R}^{q\times q}$ be a deadbeat coupling matrix. Then the array*

$$\begin{aligned} x_i^+ &= Ax_i + L\left(\sum_{j=1}^{q}\gamma_{ij}Qy_j - y_i\right), \qquad i = 1,\, 2,\, \ldots,\, q \\ y_i &= Cx_i \end{aligned} \tag{14}$$

achieves deadbeat synchronization for all $Q \in \mathbb{R}^{m\times m}$. In particular, for all initial conditions, we have $x_i(k) = x_j(k)$ for all $k \geq rp$ and all i, j; where the integers $r \geq 1$ and $p \geq 1$ satisfy $[\gamma_{ij}]^r = [\gamma_{ij}]^{r+1}$ and $(A - LC)^p = 0$.

Proof. First let $\mathbf{x} = (x_1,\, x_2,\, \ldots,\, x_q)$ and $G := [\gamma_{ij}]$. Then the array (14) can be written as

$$\mathbf{x}^+ = [I_q \otimes A + (I_q \otimes L)(G \otimes Q - I_{qm})(I_q \otimes C)]\,\mathbf{x}\,.$$

Since G is a deadbeat coupling matrix we have $G^r = \mathbf{1}\ell^T$ where $\ell \in \mathbb{R}^q$ is the left eigenvector of G for the eigenvalue $\lambda = 1$ satisfying $\ell^T\mathbf{1} = 1$. That all the remaining eigenvalues are at the origin allows us to find a transformation matrix $V \in \mathbb{R}^{q\times q}$ satisfying

$$V = [\mathbf{1}\ *] \quad \text{and} \quad V^{-1} = [\ell\ *]^T$$

as well as

$$V^{-1}GV = \begin{bmatrix} 1 & 0 \\ 0 & J \end{bmatrix}$$

for some $J \in \mathbb{R}^{(q-1)\times(q-1)}$ that is strictly upper triangular. Without loss of generality we assume that J is in Jordan form. That is, $J = \operatorname{diag}(J_1,\, J_2,\, \ldots,\, J_\sigma)$ where each (Jordan) block J_α, $\alpha \in \{1,\, 2,\, \ldots,\, \sigma\}$, is strictly upper triangular. Then the size of the largest Jordan block is no greater than $r \times r$. Employing the coordinate change $\mathbf{z} := (V^{-1} \otimes I_n)\mathbf{x}$ we can write

$$\begin{aligned} \mathbf{z}^+ &= (V^{-1} \otimes I_n)\,[I_q \otimes A + (I_q \otimes L)(G \otimes Q - I_{qm})(I_q \otimes C)]\,(V \otimes I_n)\mathbf{z} \\ &= \big[I_q \otimes A + (I_q \otimes L)(V^{-1} \otimes I_m)(G \otimes Q - I_{qm})(V \otimes I_m)(I_q \otimes C)\big]\,\mathbf{z} \\ &= \big[I_q \otimes A + (I_q \otimes L)(V^{-1}GV \otimes Q - I_{qm})(I_q \otimes C)\big]\,\mathbf{z} \\ &= \begin{bmatrix} A + L(Q - I_m)C & 0 \\ 0 & N \end{bmatrix}\mathbf{z} \end{aligned} \tag{15}$$

where

$$N = I_{q-1} \otimes A + (I_{q-1} \otimes L)(J \otimes Q - I_{(q-1)m})(I_{q-1} \otimes C)\,.$$

Since J is block diagonal with blocks strictly upper triangular, N is also block diagonal $N = \operatorname{diag}(N_1,\, N_2,\, \ldots,\, N_\sigma)$ with the structure

$$N_\alpha = \begin{bmatrix} A - LC & * & * & \cdots & * \\ 0 & A - LC & * & \cdots & * \\ 0 & 0 & A - LC & \cdots & * \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & A - LC \end{bmatrix}$$

for all $\alpha \in \{1,\, 2,\, \ldots,\, \sigma\}$. Note that the size of the largest of the blocks N_α is no greater than $rn \times rn$. And this largest block must vanish in rp steps because $(A - LC)^p = 0$. By the time the largest block has vanished the other blocks must have also vanished. We deduce therefore

$$N^{rp} = 0\,. \tag{16}$$

Equations (15) and (16) yield

$$\mathbf{x}(k) = [\mathbf{1}\ell^T \otimes (A + L(Q - I_m)C)^k]\mathbf{x}(0)$$

for all $k \geq rp$. In other words, all the solutions $x_i(\cdot)$ converge (in deadbeat fashion) to the trajectory

$$\bar{x}(k) = (A + LQC - LC)^k \bar{x}(0)$$

where $\bar{x}(0) = (\ell^T \otimes I_n)\mathbf{x}(0)$. ■

Let $f : \mathcal{X} \to \mathcal{X}$, $h : \mathcal{X} \to h(\mathcal{X}) =: \mathcal{Y}$, and $\gamma : \mathcal{Y}^q \to \mathcal{Y}^q$. Henceforth we work with the triple $(f,\, h,\, \gamma)$ under the following standing assumptions.

SA1 The pair $(f,\, h)$ satisfies Assumptions 1-2.

SA2 The map $\gamma = (\gamma_1,\, \gamma_2,\, \ldots,\, \gamma_q)$ is a deadbeat interconnection.

Now consider the following array of deadbeat observers coupled via the deadbeat interconnection γ

$$\begin{array}{rcl} x_i^+ & = & f([x_i]_{p-2}^+ \cap h^{-1}(\gamma_i))\,, \qquad i = 1,\, 2,\, \ldots,\, q \\ \gamma_i & = & \gamma_i(h(x_1),\, h(x_2),\, \ldots,\, h(x_q))\,. \end{array} \tag{17}$$

In this paper we study the deadbeat synchronization of the array (17). For the record, the formal definition is given as follows.

Definition 3 *The array* (17) *is said to achieve* deadbeat synchronization *if there exists* $\tau \in \mathbb{N}$ *such that, for all initial conditions, the solutions satisfy* $x_i(k) = x_j(k)$ *for all* $k \geq \tau$ *and all* $i,\, j$.

Even for the linear case the present conditions (SA1 and SA2) are not sufficient for deadbeat synchronization. We particularly want to emphasize here that the special structure (11) of the interconnection assumed in Theorem 2 is not merely for demonstrational convenience. To make our point let us give a linear example here where SA1 and SA2 hold, but the synchronization is not achieved.

We take $\mathcal{X} = \mathbb{R}^4$ and $\mathcal{Y} = \mathbb{R}^2$. Let $f(x) = Ax$ and $h(x) = Cx$ with

$$A = \begin{bmatrix} 0 & -1 & 1 & 0 \\ -1 & 0 & 0 & -1 \\ 1 & 0 & 0 & 0 \\ -1 & -1 & -1 & 1 \end{bmatrix} \quad \text{and} \quad C = \begin{bmatrix} 0 & -1 & 1 & -1 \\ -1 & 1 & 0 & 1 \end{bmatrix}$$

Assumption 1 is satisfied since A is nonsingular. Assumption 2 is also satisfied (with $p = 2$) because

$$[x]_0^+ \cap h^{-1}(y) = x + H(y - Cx)$$

where H can be computed as

$$H = AC^\perp (CAC^\perp)^{-1} = \begin{bmatrix} -1 & -5/4 \\ 1 & 6/4 \\ 0 & -1/4 \\ -2 & -7/4 \end{bmatrix}$$

Note that $(A - AHC)^2 = 0$. We deduce therefore that SA1 holds. As for the deadbeat interconnection, we take $\gamma(\mathbf{y}) = \Gamma\mathbf{y}$ where $\Gamma \in \mathbb{R}^{4\times 4}$ is as in (12), which is known to satisfy SA2. Hence the triple $(f, h, \gamma) = (A, C, \Gamma)$ satisfies conditions SA1 and SA2. Under our parameter choice the array (17) enjoys the following form

$$\begin{bmatrix} x_1 \\ x_2 \end{bmatrix}^+ = \underbrace{(I_2 \otimes A)(I_8 + (I_2 \otimes H)(\Gamma - I_4)(I_2 \otimes C))}_{\Phi} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

which does not achieve deadbeat synchronization. Because if it did then it would necessarily require that the matrix $\Phi \in \mathbb{R}^{8\times 8}$ has at least $(q-1)n = 4$ of its eigenvalues at the origin. However, the characteristic polynomial of Φ turns out to be $d(s) = s^8 - 3.5s^7 - 1.5s^6 + 11.5s^5 - 2.5s^4 - 8s^3 - 2s^2$.

This example justifies that SA1 and SA2 are not sufficient and additional conditions are needed for synchronization. We here provide (in Definition 4) such a condition that guarantees the deadbeat synchronization of the array (17). First, however, we need to introduce some notation associated with the triple (f, h, γ).

Recall $\mathbf{y} = (y_1, y_2, \ldots, y_q)$ and $\mathbf{x} = (x_1, x_2, \ldots, x_q)$. By some abuse of notation we let $f(\mathbf{x}) = (f(x_1), f(x_2), \ldots, f(x_q))$. For instance, if $f(x) = Ax$, then $f(\mathbf{x}) = (I_q \otimes A)\mathbf{x}$. Likewise, $h(\mathbf{x}) = (h(x_1), h(x_2), \ldots, h(x_q))$. Also, for $\sigma \in \mathbb{N}$, we define

$$\mathcal{Y}_\sigma := \{\mathbf{y} \in \mathcal{Y}^q : \gamma^\sigma(\mathbf{y}) \in \mathcal{Y}_0\}$$

where

$$\mathcal{Y}_0 := \{\mathbf{y} \in \mathcal{Y}^q : y_1 = y_2 = \cdots = y_q\} .$$

Definition 4 *The triple $(f,\, h,\, \gamma)$ is said to be* compatible *if, for all $\sigma \geq 1$ and $\mathbf{x} \in \mathcal{X}^q$,*

$$h(f^k(\mathbf{x})) \in \mathcal{Y}_\sigma \quad \forall k \in \{0,\, 1,\, \ldots,\, p-1\} \implies h(f^p(\mathbf{x})) \in \mathcal{Y}_\sigma$$

where p is as in Assumption 2.

Remark 1 *The notation introduced here allows us to rephrase Definition 2 more compactly as follows. A deadbeat interconnection $\gamma : \mathcal{Y}^q \to \mathcal{Y}^q$ is such that $\gamma(\mathcal{Y}_0) \subset \mathcal{Y}_0$ and $\gamma^r(\mathcal{Y}^q) \subset \mathcal{Y}_0$ for some $r \geq 1$.*

When studying nonlinear systems, a first step towards forming an opinion on whether an assumption is too restrictive or not for the goal to be achieved is to see what it boils down to for linear systems. For this purpose we want to point out that for the linear array (14) compatibility is implied by our standing assumptions whenever the matrix Q is nonsingular. The below theorem formalizes this.

Theorem 3 *Let $A \in \mathbb{R}^{n\times n}$ be nonsingular and $C \in \mathbb{R}^{m\times n}$ be such that there exists $L \in \mathbb{R}^{n\times m}$ satisfying $(A-LC)^p = 0$. Then, given $Q \in \mathbb{R}^{m\times m}$ nonsingular and a deadbeat coupling matrix $G \in \mathbb{R}^{q\times q}$, the triple $(A,\, C,\, G\otimes Q)$ is compatible.*

Proof. Since G is a deadbeat coupling matrix, for some integer $r \leq q-1$, we have $G^r = G^{r+1} = \mathbf{1}\ell^T$ where $\ell \in \mathbb{R}^q$ is the left eigenvector of G for the eigenvalue $\lambda = 1$ satisfying $\ell^T\mathbf{1} = 1$. That Q is nonsingular allows us to write $\mathcal{Y}_\sigma = \mathcal{N}((G^\sigma - \mathbf{1}\ell^T) \otimes I_m)$. Given σ, let $\{v_1,\, v_2,\, \ldots,\, v_\alpha\}$ be a basis for $\mathcal{N}(G^\sigma - \mathbf{1}\ell^T)$ and $\{e_1,\, e_2,\, \ldots,\, e_m\}$ be a basis for $\mathbb{R}^m$. Then the set $\bigcup_{i,\,j}\{v_i \otimes e_j\}$ makes a basis for $\mathcal{Y}_\sigma$. Now, given $\mathbf{x} \in \mathbb{R}^{qn}$, suppose $(I_q \otimes CA^k)\mathbf{x} \in \mathcal{Y}_\sigma$ for all $k = 0,\, 1,\, \ldots,\, p-1$. Note that we can find scalars α_{kij} such that

$$(I_q \otimes CA^k)\mathbf{x} = \sum_{i=1}^{\alpha}\sum_{j=1}^{m} \alpha_{kij}(v_i \otimes e_j) .$$

Since A is nonsingular, that we can find some L satisfying $(A-LC)^p = 0$ implies $[C^T \;\; A^TC^T \;\; \ldots \;\; A^{(p-1)T}C^T]$ is full row rank. Hence for each $k = 0,\, 1,\, \ldots,\, p-1$ we can find $M_k \in \mathbb{R}^{m\times m}$ such that

$$\sum_{k=0}^{p-1} M_k CA^k = CA^p .$$

We can then write

$$\begin{aligned}
(I_q \otimes CA^p)\mathbf{x} &= \sum_{k=0}^{p-1} (I_q \otimes M_k CA^k)\mathbf{x} \\
&= \sum_{k=0}^{p-1} (I_q \otimes M_k)(I_q \otimes CA^k)\mathbf{x} \\
&= \sum_{k=0}^{p-1} (I_q \otimes M_k) \sum_{i=1}^{\alpha} \sum_{j=1}^{m} \alpha_{kij}(v_i \otimes e_j) \\
&= \sum_{k=0}^{p-1} \sum_{i=1}^{\alpha} \sum_{j=1}^{m} \alpha_{kij}(v_i \otimes M_k e_j) \\
&\in \mathcal{Y}_\sigma
\end{aligned}$$

because $((G^\sigma - \mathbf{1}\ell^T) \otimes I_m)(v_i \otimes M_k e_j) = (G^\sigma - \mathbf{1}\ell^T)v_i \otimes M_k e_j = 0$. ■

Below is our main result.

Theorem 4 *The array* (17) *achieves deadbeat synchronization provided that the triple* (f, h, γ) *is compatible.*

The demonstration of Theorem 4 requires some preliminary results, which we provide below as three lemmas. The first of these results concerns some properties of the set-valued functions $x \mapsto [x]_k$ and $x \mapsto [x]_k^+$.

Notation. Henceforth, in this section only, we will avoid the standard use of parentheses when the risk of confusion is negligible. For instance, $h^{-1}(h(x))$ will be replaced by $h^{-1}hx$.

Lemma 1 *Let* $x \in \mathcal{X}$ *and* $k, \alpha \in \mathbb{N}$. *The following hold.*

1. $x \in [x]_k$ *and* $x \in [x]_k^+$.
2. $[[x]_{k+\alpha}]_k = [x]_k$ *and* $[[x]_{k+\alpha}^+]_k^+ = [x]_k^+$.

Proof. We begin with proving the first property. Notice that $x \in h^{-1}hx = [x]_0$. Now suppose $x \in [x]_k$ for some k and all x. Then we can write (since f is bijective) $x = ff^{-1}x \in f[f^{-1}x]_k = [x]_k^+$. Thence $x \in [x]_k^+ \cap [x]_0 = [x]_{k+1}$. The result follows by induction.

Now we demonstrate the second property. Observe that if $z \in [x]_0$ then $hz = hx$, which implies $[z]_0 = [x]_0$. We claim for all k that

$$z \in [x]_k \implies [z]_k = [x]_k\,. \tag{18}$$

To prove our claim we suppose that it holds for some k. Let x, z be such that $z \in [x]_{k+1} = f[f^{-1}x]_k \cap [x]_0$. This means that $z \in [x]_0$, which yields $[z]_0 = [x]_0$. Also,

$$\begin{aligned}
z \in f[f^{-1}x]_k &\implies f^{-1}z \in [f^{-1}x]_k \\
&\implies [f^{-1}z]_k = [f^{-1}x]_k\,.
\end{aligned}$$

Then we can write

$$\begin{aligned}[z]_{k+1} &= f[f^{-1}z]_k \cap [z]_0 \\ &= f[f^{-1}x]_k \cap [x]_0 \\ &= [x]_{k+1}\end{aligned}$$

whence (18) follows by induction. Notice that $[x]_1 \subset [x]_0$ since $[x]_1 = f[f^{-1}x]_0 \cap [x]_0$. Our second claim is

$$[x]_{k+\alpha} \subset [x]_k \tag{19}$$

for all k and α. Note that it is enough to establish this for $\alpha = 1$. Again we employ induction. Suppose (19) holds with $\alpha = 1$ for some k. Then

$$\begin{aligned}[x]_{k+2} &= f[f^{-1}x]_{k+1} \cap [x]_0 \\ &\subset f[f^{-1}x]_k \cap [x]_0 \\ &= [x]_{k+1}\,.\end{aligned}$$

Now, by (18) and (19) we have

$$\begin{aligned}[[x]_{k+\alpha}]_k &= \bigcup_{z\in[x]_{k+\alpha}} [z]_k \\ &\subset \bigcup_{z\in[x]_k} [z]_k \\ &= [x]_k\,.\end{aligned}$$

Moreover,

$$\begin{aligned}[[x]^+_{k+\alpha}]^+_k &= f[f^{-1}f[f^{-1}x]_{k+\alpha}]_k \\ &= f[[f^{-1}x]_{k+\alpha}]_k \\ &= f[f^{-1}x]_k \\ &= [x]^+_k\end{aligned}$$

which completes the demonstration of Lemma 1. ■

Note that the array (17) leads to the following system in $\mathcal{X}^q$

$$\mathbf{x}^+ = f([\mathbf{x}]^+_{p-2} \cap h^{-1}\gamma h\mathbf{x}) \tag{20}$$

where $[\mathbf{x}]^+_{p-2} = ([x_1]^+_{p-2}, [x_2]^+_{p-2}, \ldots, [x_q]^+_{p-2})$. The next two results concern the system (20).

Lemma 2 *Consider the system* (20)*. For all $k \geq p-1$ the solution $\mathbf{x}(k) =: \mathbf{x}_k$ satisfies*

$$\mathbf{x}_k \in f^{\alpha-1}[\mathbf{x}_{k-\alpha+1}]^+_{p-\alpha} \tag{21}$$

for all $\alpha \in \{1, 2, \ldots, p\}$.

Proof. Suppose (21) holds for some $\alpha \in \{1, 2, \ldots, p-1\}$. Then we can write by (20) and Lemma 1

$$\begin{aligned}
\mathbf{x}_k &\in f^{\alpha-1}[\mathbf{x}_{k-\alpha+1}]^+_{p-\alpha} \\
&= f^{\alpha-1} f[f^{-1}\mathbf{x}_{k-\alpha+1}]_{p-\alpha} \\
&= f^{\alpha}[f^{-1}\mathbf{x}_{k-\alpha+1}]_{p-\alpha} \\
&= f^{\alpha}[f^{-1} f([\mathbf{x}_{k-\alpha}]^+_{p-2} \cap h^{-1}\gamma h \mathbf{x}_{k-\alpha})]_{p-\alpha} \\
&= f^{\alpha}[[\mathbf{x}_{k-\alpha}]^+_{p-2} \cap h^{-1}\gamma h \mathbf{x}_{k-\alpha}]_{p-\alpha} \\
&\subset f^{\alpha}[[\mathbf{x}_{k-\alpha}]^+_{p-2}]_{p-\alpha} \\
&= f^{\alpha}([[\mathbf{x}_{k-\alpha}]^+_{p-2}]^+_{p-\alpha-1} \cap [[\mathbf{x}_{k-\alpha}]^+_{p-2}]_0) \\
&\subset f^{\alpha}[[\mathbf{x}_{k-\alpha}]^+_{p-2}]^+_{p-\alpha-1} \\
&= f^{\alpha}[\mathbf{x}_{k-\alpha}]^+_{p-\alpha-1}\,.
\end{aligned}$$

By Lemma 1 we also have $\mathbf{x}_k \in [\mathbf{x}_k]^+_{p-1}$ which verifies (21) for $\alpha = 1$. The result then follows by induction. ∎

Lemma 3 *Consider the system* (20)*. For all $k \geq p$ the solution satisfies*

$$h f^{-\alpha}\mathbf{x}_k = \gamma h \mathbf{x}_{k-\alpha}$$

for all $\alpha \in \{1, 2, \ldots, p\}$.

Proof. By Lemma 2 we can write

$$\begin{aligned}
h f^{-\alpha}\mathbf{x}_k &\in h f^{-\alpha} f^{\alpha-1}[\mathbf{x}_{k-\alpha+1}]^+_{p-\alpha} \\
&= h f^{-1}[\mathbf{x}_{k-\alpha+1}]^+_{p-\alpha} \\
&= h f^{-1} f[f^{-1}\mathbf{x}_{k-\alpha+1}]_{p-\alpha} \\
&= h[[\mathbf{x}_{k-\alpha}]^+_{p-2} \cap h^{-1}\gamma h \mathbf{x}_{k-\alpha}]_{p-\alpha} \\
&\subset h[h^{-1}\gamma h \mathbf{x}_{k-\alpha}]_{p-\alpha} \\
&\subset h[h^{-1}\gamma h \mathbf{x}_{k-\alpha}]_0 \\
&= h h^{-1} h h^{-1}\gamma h \mathbf{x}_{k-\alpha} \\
&= \gamma h \mathbf{x}_{k-\alpha}
\end{aligned}$$

where we used (20) and Lemma 1. ∎

Proof of Theorem 4. Consider the system (20). Given some $k \geq p$ and $\sigma \geq 1$, suppose $h\mathbf{x}_{k-\alpha} \in \mathcal{Y}_\sigma$ for all $\alpha \in \{1, 2, \ldots, p\}$. Then by Lemma 3 we have

$$\begin{aligned}
h f^{-\alpha}\mathbf{x}_k &= \gamma h \mathbf{x}_{k-\alpha} \\
&\in \gamma \mathcal{Y}_\sigma \\
&= \mathcal{Y}_{\sigma-1}
\end{aligned}$$

for all $\alpha \in \{1, 2, \ldots, p\}$. By compatibility therefore $h\mathbf{x}_k \in \mathcal{Y}_{\sigma-1}$. Hence we established

$$h\mathbf{x}_{k-\alpha} \in \mathcal{Y}_\sigma \quad \forall \alpha \in \{1, 2, \ldots, p\} \implies h\mathbf{x}_k \in \mathcal{Y}_{\sigma-1}\,. \tag{22}$$

Now note that $\mathcal{Y}_{\sigma-1} \subset \mathcal{Y}_\sigma$ by definition and $\mathcal{Y}_r = \mathcal{Y}^q$, where $r \geq 1$ satisfies $\gamma^r \mathcal{Y}^q = \mathcal{Y}_0$ because γ is a deadbeat interconnection. In the light of these facts, (22) implies $h\mathbf{x}_{\tau-\alpha} \in \mathcal{Y}_1$ for all $\alpha \in \{1, 2, \ldots, p\}$, where $\tau := rp$. Evoking Lemma 3 once again we have

$$\begin{aligned} hf^{-\alpha}\mathbf{x}_\tau &= \gamma h \mathbf{x}_{\tau-\alpha} \\ &\in \gamma \mathcal{Y}_1 \\ &= \mathcal{Y}_0\,. \end{aligned}$$

The interpretation of this for the array (17) is

$$hf^{-\alpha}x_i(\tau) = hf^{-\alpha}x_j(\tau) \qquad \forall\, i,\, j \in \{1, 2, \ldots, q\} \tag{23}$$

for all $\alpha \in \{1, 2, \ldots, p\}$. Note that Assumption 2 and the first property listed in Lemma 1 imply $x = h^{-1}hx \cap [x]^+_{p-2}$ for all $x \in \mathcal{X}$. Then we can write

$$\begin{aligned} x &= h^{-1}hx \cap [x]^+_{p-2} \\ &= h^{-1}hx \cap f[f^{-1}x]_{p-2} \\ &= h^{-1}hx \cap f(h^{-1}hf^{-1}x \cap [f^{-1}x]^+_{p-3}) \\ &= h^{-1}hx \cap fh^{-1}hf^{-1}x \cap f[f^{-1}x]^+_{p-3} \\ &\vdots \\ &= h^{-1}hx \cap fh^{-1}hf^{-1}x \cap \cdots \cap f^{p-1}h^{-1}hf^{1-p}x \cap f^{p-1}[f^{1-p}x]^+_{-1} \\ &= h^{-1}hx \cap fh^{-1}hf^{-1}x \cap \cdots \cap f^{p-1}h^{-1}hf^{1-p}x \end{aligned}$$

where for the last step we used the property $[x]^+_{-1} = \mathcal{X}$. By (23) we can then write

$$\begin{aligned} f^{-1}x_i(\tau) &= \bigcap_{\alpha \in \{1, 2, \ldots, p\}} f^{\alpha-1}h^{-1}hf^{-\alpha}x_i(\tau) \\ &= \bigcap_{\alpha \in \{1, 2, \ldots, p\}} f^{\alpha-1}h^{-1}hf^{-\alpha}x_j(\tau) \\ &= f^{-1}x_j(\tau)\,. \end{aligned}$$

Recall that f is bijective. Hence $x_i(\tau) = x_j(\tau)$. This equality emerges from arbitrary initial conditions. Time-invariance of the array (17) therefore implies that $x_i(k) = x_j(k)$ for all $k \geq \tau$ and all i, j. ■

Remark 2 *Note that the map* $\mathbf{x} \mapsto f([\mathbf{x}]^+_{p-2} \cap h^{-1}\gamma h\mathbf{x})$ *is itself a deadbeat interconnection (over* $\mathcal{X}^q$*) for* $(f,\, h,\, \gamma)$ *compatible.*

Remark 3 *Observe that Theorem 1 directly follows from Theorem 4 by letting the interconnection* $\gamma : \mathcal{Y}^2 \to \mathcal{Y}^2$ *be such that* $\gamma_1\mathbf{y} = \gamma_2\mathbf{y} = y_1$.

6 An example

In this section we provide an example where an array of nonlinear deadbeat observers synchronize. The below pair $(f,\, h)$ is borrowed from [14].

$$f(x) = \begin{bmatrix} b \\ c^{1/3} \\ a^3 + b^3 \end{bmatrix}, \quad h(x) = a \tag{24}$$

with $(a,\, b,\, c) = x \in \mathcal{X} = \mathbb{R}^3$ and $\mathcal{Y} = \mathbb{R}$. The map f is bijective and we have

$$[x]_1^+ \cap h^{-1}(y) = \begin{bmatrix} y \\ b \\ c - a^3 + y^3 \end{bmatrix}$$

which is singleton. (We refer the reader to [14] for derivations.) Therefore SA1 is satisfied with deadbeat horizon $p = 3$. Regarding the deadbeat interconnection γ, our choice is the one given in (13) for $[\gamma_{ij}] \in \mathbb{R}^{q\times q}$ a deadbeat coupling matrix. Hence SA2 holds. The question now is whether the triple $(f,\, h,\, \gamma)$ is compatible or not.

Claim 1 *The triple* $(f,\, h,\, \gamma)$ *described by* (24) *and* (13) *is compatible.*

Proof. Let $G := [\gamma_{ij}]$. Since G is a deadbeat coupling matrix, for some integer $r \leq q-1$, we have $G^r = G^{r+1} = \mathbf{1}\ell^T$ where $\ell \in \mathbb{R}^q$ is the left eigenvector of G for the eigenvalue $\lambda = 1$ satisfying $\ell^T\mathbf{1} = 1$. Let $\mathbf{y} = (y_1,\, y_2,\, \ldots,\, y_q) \in \mathbb{R}^q$ and $\mathbf{y}^u := (y_1^u,\, y_2^u,\, \ldots,\, y_q^u)$ for $u \in \mathbb{Q}$. Then we have $\mathcal{Y}_\sigma = \{\mathbf{y} \in \mathcal{Y}^q : \mathbf{y}^3 \in \mathcal{N}(G^\sigma - \mathbf{1}\ell^T)\}$. Note that

$$\begin{aligned} \mathbf{y},\, \mathbf{v} \in \mathcal{Y}_\sigma \quad &\Longrightarrow \quad \mathbf{y}^3,\, \mathbf{v}^3 \in \mathcal{N}(G^\sigma - \mathbf{1}\ell^T) \\ &\Longrightarrow \quad \mathbf{y}^3 + \mathbf{v}^3 \in \mathcal{N}(G^\sigma - \mathbf{1}\ell^T) \\ &\Longrightarrow \quad (\mathbf{y}^3 + \mathbf{v}^3)^{1/3} \in \mathcal{Y}_\sigma \end{aligned} \tag{25}$$

since $\mathcal{N}(G^\sigma - \mathbf{1}\ell^T)$ is a linear subspace.

Given $\mathbf{x} = (x_1,\, x_2,\, \ldots,\, x_q)$ with $x_i = (a_i,\, b_i,\, c_i)$ note that

$$f(x_i) = \begin{bmatrix} b_i \\ c_i^{1/3} \\ a_i^3 + b_i^3 \end{bmatrix}, \; f^2(x_i) = \begin{bmatrix} c_i^{1/3} \\ (a_i^3 + b_i^3)^{1/3} \\ * \end{bmatrix}, \; f^3(x_i) = \begin{bmatrix} (a_i^3 + b_i^3)^{1/3} \\ * \\ * \end{bmatrix}$$

Suppose now $h(\mathbf{x}),\, h(f(\mathbf{x})),\, h(f^2(\mathbf{x})) \in \mathcal{Y}_\sigma$ for some σ. That is,

$$\begin{bmatrix} a_1 \\ a_2 \\ \vdots \\ a_q \end{bmatrix}, \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ b_q \end{bmatrix}, \begin{bmatrix} c_1^{1/3} \\ c_2^{1/3} \\ \vdots \\ c_q^{1/3} \end{bmatrix} \in \mathcal{Y}_\sigma\,.$$

Then by (25) we can write

$$h(f^3(\mathbf{x})) = \begin{bmatrix} (a_1^3+b_1^3)^{1/3} \\ (a_2^3+b_2^3)^{1/3} \\ \vdots \\ (a_q^3+b_q^3)^{1/3} \end{bmatrix} = \left(\begin{bmatrix} a_1 \\ a_2 \\ \vdots \\ a_q \end{bmatrix}^3 + \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ b_q \end{bmatrix}^3 \right)^{1/3} \in \mathcal{Y}_\sigma \,.$$

Hence the result. ■

Now that all the required conditions are met, the following array of q coupled deadbeat observers should achieve deadbeat synchronization

$$\begin{aligned} x_i^+ &= f\left([x_i]_1^+ \cap h^{-1}\left(\left(\gamma_{i1}a_1^3 + \gamma_{i2}a_2^3 + \ldots + \gamma_{iq}a_q^3\right)^{1/3}\right)\right) \\ &= \begin{bmatrix} b_i \\ \left(c_i - a_i^3 + \gamma_{i1}a_1^3 + \gamma_{i2}a_2^3 + \ldots + \gamma_{iq}a_q^3\right)^{1/3} \\ b_i^3 + \gamma_{i1}a_1^3 + \gamma_{i2}a_2^3 + \ldots + \gamma_{iq}a_q^3 \end{bmatrix} \end{aligned}$$

for all deadbeat coupling matrices $[\gamma_{ij}] \in \mathbb{R}^{q\times q}$. For instance, letting $[\gamma_{ij}]$ be as in (10), the following array is obtained.

$$\begin{aligned} x_1^+ &= \begin{bmatrix} b_1 \\ \left(c_1 - a_1^3 + 0.1a_1^3 + 0.65a_2^3 + 0.25a_3^3\right)^{1/3} \\ b_1^3 + 0.1a_1^3 + 0.65a_2^3 + 0.25a_3^3 \end{bmatrix} \\ x_2^+ &= \begin{bmatrix} b_2 \\ \left(c_2 - a_2^3 + 0.2a_1^3 + 0.3a_2^3 + 0.5a_3^3\right)^{1/3} \\ b_2^3 + 0.2a_1^3 + 0.3a_2^3 + 0.5a_3^3 \end{bmatrix} \\ x_3^+ &= \begin{bmatrix} b_3 \\ \left(c_3 - a_3^3 + 0.24a_1^3 + 0.16a_2^3 + 0.6a_3^3\right)^{1/3} \\ b_3^3 + 0.24a_1^3 + 0.16a_2^3 + 0.6a_3^3 \end{bmatrix} \end{aligned}$$

Synchronization is achieved in $pr = 6$ steps, where $r = 2$ is the smallest integer satisfying $[\gamma_{ij}]^{r+1} = [\gamma_{ij}]^r$. Fig. 1 shows the simulation results for the initial conditions $x_1(0) = (1,\,0,\,-1)$, $x_2(0) = (0,\,1,\,0)$, and $x_3(0) = (-1,\,-1,\,2)$.

7 Notes

The deadbeat interconnection considered in this paper is fixed. A possible relaxation is suggested by the proof of Theorem 4. Namely, deadbeat synchronization would still be achieved with time-varying interconnection $\gamma(k,\,\mathbf{y})$ provided that the sets $\mathcal{Y}_\sigma$ stayed fixed and the relation $\gamma(k,\,\mathcal{Y}_\sigma) \subset \mathcal{Y}_{\sigma-1}$ was satisfied at all times k. Further generalization in this direction seems not to be straightforward though.

A practical design problem is how to construct a deadbeat interconnection compatible with a given $(f,\,h)$ pair. A primitive solution to this problem is

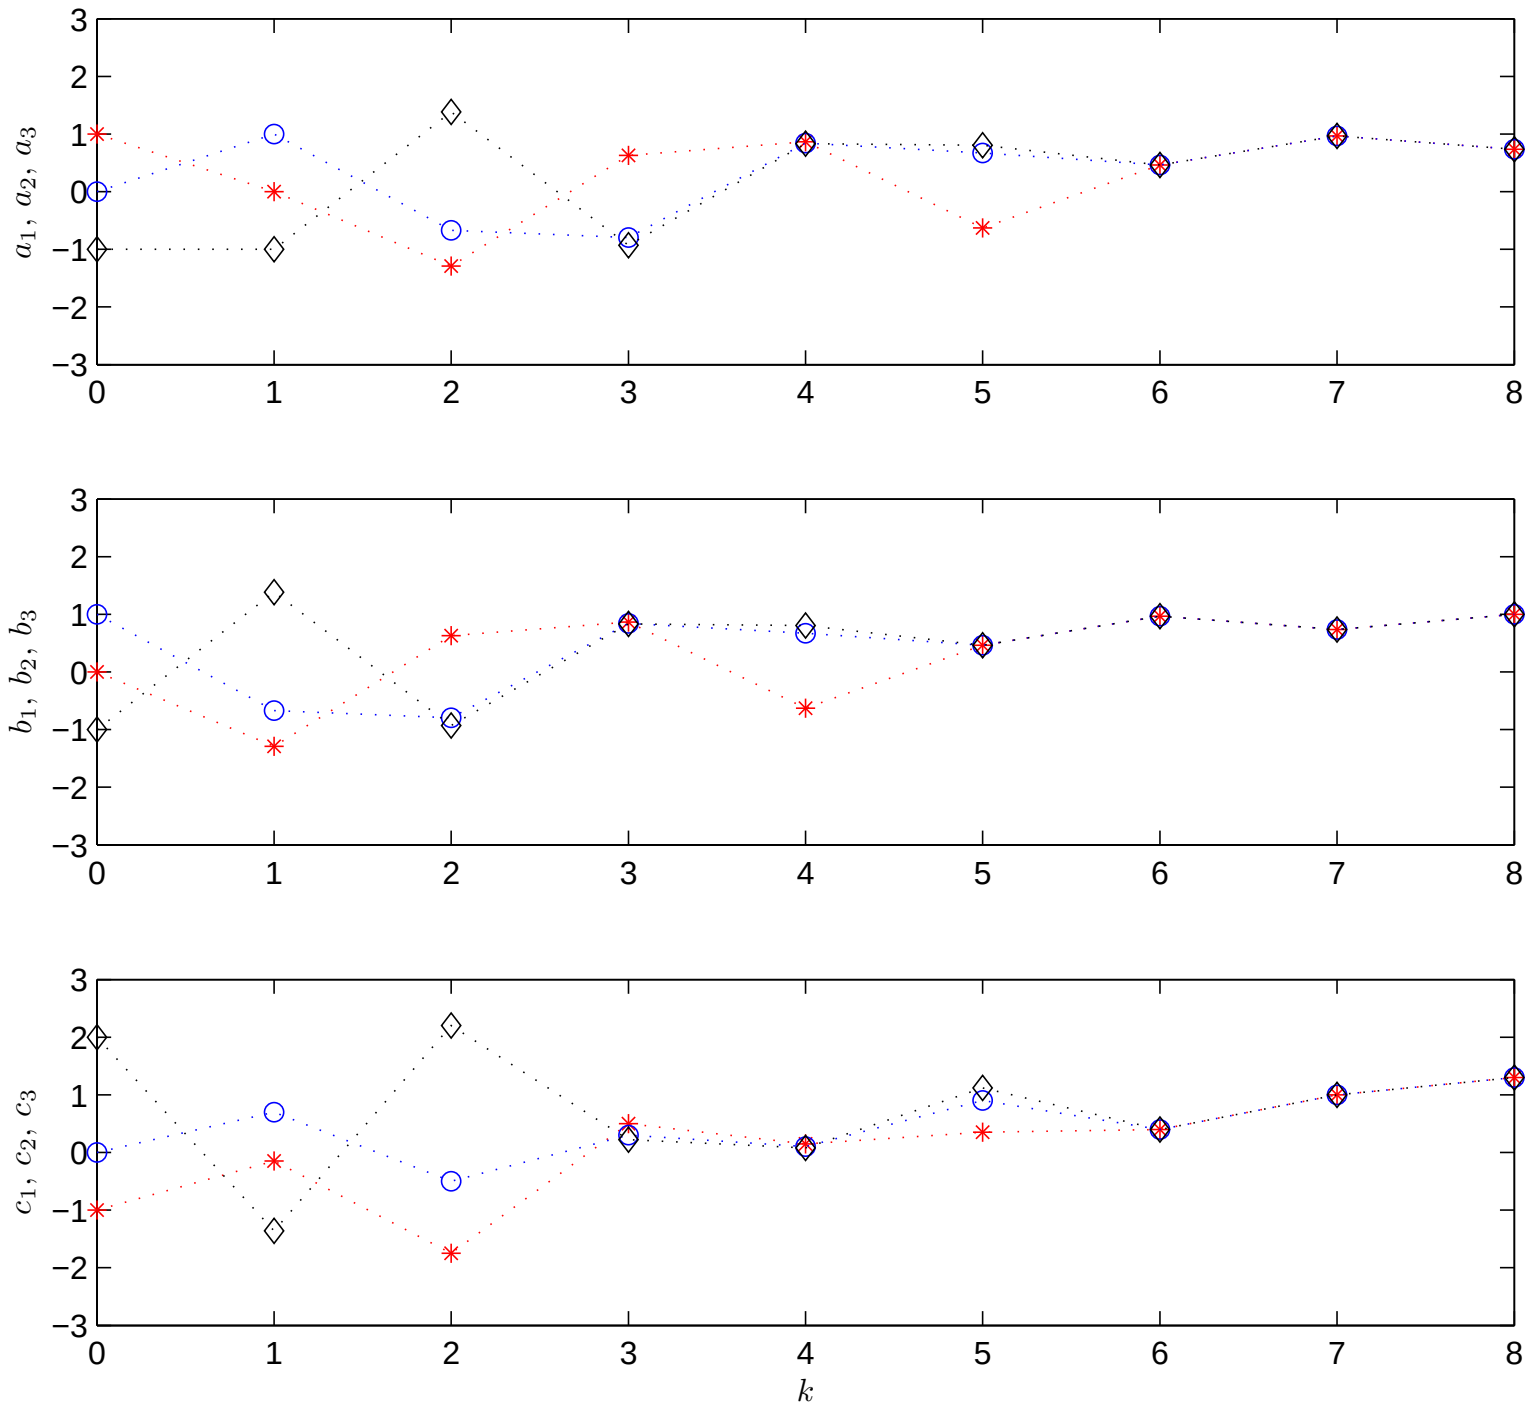

Figure 1: Evolution of states x_1 (marked $*$), x_2 (marked $\circ$), and x_3 (marked $\diamond$).

to select an interconnection that admits a connected graph that is a (directed) tree. In that case, in an array of q systems, $q-1$ of the systems would be observing exactly one other system, i.e., for each $i \in \{1, 2, \ldots, q-1\}$ we would have $\gamma_i(\mathbf{y}) = y_j$ for some $j \neq i$, and one system (the root) would be observing no one, i.e., $\gamma_q(\mathbf{y}) = y_q$. However, when one starts considering interconnection schemes that include cycles in their graphs, the problem seems to lack an obvious systematic solution.

References

[1] A. De Angeli, R. Genesio, and A. Tesi. Dead-beat chaos synchronization in discrete-time systems. *IEEE Transactions on Circuits and Systems–I: Fundamental Theory and Applications*, 42(1):54–56, 1995.

[2] S.T. Glad. Observability and nonlinear dead beat observers. In *Proc. of the 22nd IEEE Conference on Decision and Control*, pages 800–802, 1983.

[3] G. Grassi and D.A. Miller. Theory and experimental realization of observer-based discrete-time hyperchaos synchronization. *IEEE Transactions on Circuits and Systems–I: Fundamental Theory and Applications*, 49(3):373–378, 2002.

[4] G. Grassi and D.A. Miller. Dead-beat full state hybrid projective synchronization for chaotic maps using a scalar synchronizing signal. *Communications in Nonlinear Science and Numerical Simulation*, 17(4):1824–1830, 2012.

[5] D.B. Kingston and R.W. Beard. Discrete-time average-consensus under switching network topologies. In *Proc. of the American Control Conference*, pages 3551–3556, 2006.

[6] K.-Y. Lian, P. Liu, C.-S. Chiu, and T.-S. Chiang. Robust dead-beat synchronization and communication for discrete-time chaotic systems. *International Journal of Bifurcation and Chaos*, 12(4):835–846, 2002.

[7] L. Moreau. Stability of multi-agent systems with time-dependent communication links. *IEEE Transactions on Automatic Control*, 50(2):169–182, 2005.

[8] R. Olfati-Saber, J.A. Fax, and R.M. Murray. Consensus and cooperation in networked multi-agent systems. *Proceedings of the IEEE*, 95(1):215–233, 2007.

[9] L.M. Pecora and T.L. Carroll. Master stability functions for synchronized coupled systems. *Physical Review Letters*, 80(10):2109–2112, 1998.

[10] A. Rodriguez-Vazquez, J.L. Huertas, A. Rueda, B. Perez-Verdu, and L.O. Chua. Chaos from switched-capacitor circuits: discrete maps. *Proceedings of the IEEE*, 75(8):1090–1106, 1987.

[11] W.J. Rugh. *Linear System Theory.* Second Edition, Prentice Hall, 1996.

[12] S. Sundaram and C.N. Hadjicostis. Finite-time distributed consensus in graphs with time-invariant topologies. In *Proc. of the American Control Conference*, pages 711–716, 2007.

[13] S.E. Tuna. Synchronizing linear systems via partial-state coupling. *Automatica*, 44(8):2179–2184, 2008.

[14] S.E. Tuna. Deadbeat observer: construction via sets. *IEEE Transactions on Automatic Control*, 2012. doi: `10.1109/TAC.2012.2183197`.

[15] M.E. Valcher and J.C. Willems. Dead beat observer synthesis. *Systems & Control Letters*, 37(5):285–292, 1999.

[16] X.F. Wang. Complex networks: topology, dynamics and synchronization. *International Journal of Bifurcation and Chaos*, 12(5):885–916, 2002.

[17] W.M. Wonham. Dynamic observers–geometric theory. *IEEE Transactions on Automatic Control*, 15(2):258–259, 1970.

[18] W.M. Wonham. *Linear Multivariable Control: A Geometric Approach.* Third Edition, Springer, 1985.

[19] C.W. Wu and L.O. Chua. Synchronization in an array of linearly coupled dynamical systems. *IEEE Transactions on Circuits and Systems–I: Fundamental Theory and Applications*, 42(8):430–447, 1995.